

APPLICATION

The guide mount motor bracket is intended for use with LiftMaster model 3950 operators. The mounting bracket allows the installer to choose the appropriate location for the operator.

INSTALLATION

The mounting bracket can be installed in the following locations:

- Inside the door guide
 - Outside the door guide
1. Disconnect power to the operator.
 2. Choose the appropriate location for the mounting bracket.
 3. Align the mounting bracket to the door guide.
 4. Secure the mounting bracket to the wall and door guide using appropriate hardware.
 5. Secure the operator to the mounting bracket using the appropriate hardware.
 6. Attach the chain.
 7. Reconnect power to the operator.

WARNING

To prevent possible **SERIOUS INJURY** or **DEATH**, disconnect electric power to operator **BEFORE** installing.


To avoid possible **SERIOUS INJURY** keep fingers clear of the sprocket to avoid pinching fingers between the chain and the sprocket.

If operator is installed below 8 feet, UL requires a chain guard installed to prevent possible **INJURY**.

CARTON INVENTORY

ITEM	QTY
Mounting Bracket	1
Carriage Bolt 5/16-18" x 1"	2
Hex Nut 5/16-18"	2

INSIDE THE DOOR GUIDE

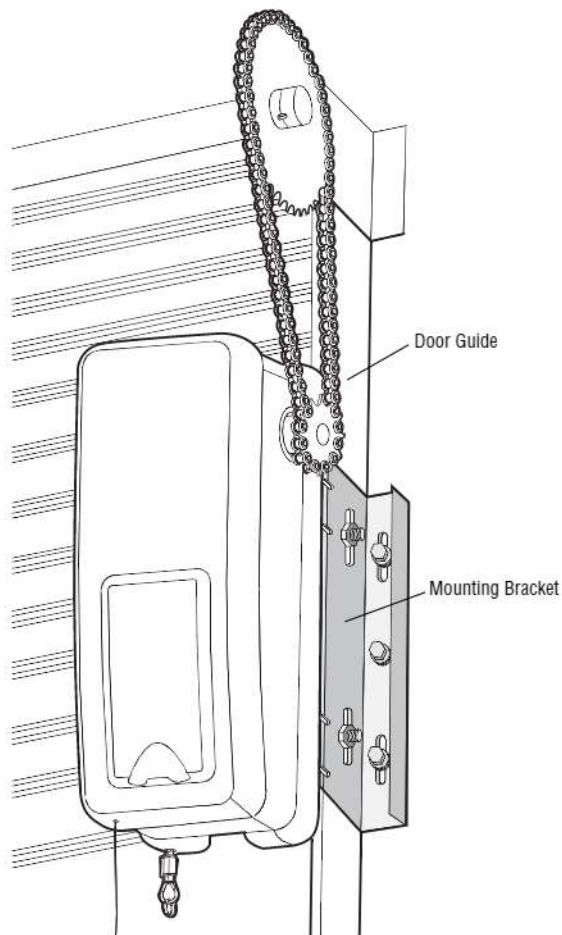

OUTSIDE THE DOOR GUIDE

