
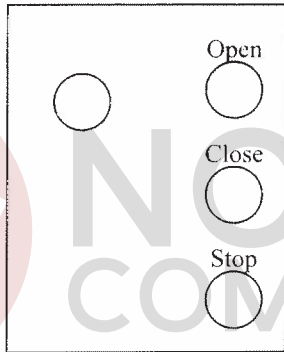


639T



NORTH SHORE
COMMERCIAL DOOR.COM

Open, Close & Stop Transmitter to Control 9 Doors.
Match dipswitches 1 thru 6 on both transmitter and receiver.
Set the 7th and 8th dipswitch in open/close/stop receivers accordingly.

Receiver	Dial Setting	7th Dipswitch on Receiver	8th dipswitch on Receiver
Door 1	1	“+”	“+”
Door 2	2	“+”	“O”
Door 3	3	“+”	“_”
Door 4	4	“O”	“+”
Door 5	5	“O”	“O”
Door 6	6	“O”	“_”
Door 7	7	“_”	“+”
Door 8	8	“_”	“O”
Door 9	9	“_”	“_”

“Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment”