

# User manual

## INSTRUCTIONS FOR RADIO CONTROL OPERATOR SINGLE ENTRY TRANSMITTER MODEL NO.: G220

**READ THE FOLLOWING INSTRUCTIONS THOROUGHLY BEFORE USING SWITCHES.**  
THIS TRANSMITTER MUST BE ADJUSTED SO THAT THE CODING SWITCHES MATCH  
THE CODING SWITCHES ON YOUR PRESENT OPERATING TRANSMITTER OR RECEI-  
-VER.

### INSTRUCTIONS FOR SINGLE ENTRY TRANSMITTER

#### 1. REMOVE THE TRANSMITTER COVER

REMOVE THE ACCESS COVER FROM THE FRONT OF THE TRANSMITTER BY SLID-  
ING THE COVER AWAY FROM THE TOP OF THE TRANSMITTER (FIGURE A). THIS  
WILL EXPOSE THE BATTERY AND THE DIP SWITCHES. THE CODE CAN NOW BE  
CHANGED USING A SMALL SCREWDRIVER.


#### 2. SETTING THE CODE

YOU MAY SET YOUR TRANSMITTER TO ANY CODE YOU DESIRE, BUT BE SURE THE  
CODE YOU SET MATCHES ON BOTH YOUR TRANSMITTER AND RECEIVER.

THERE ARE 12 DIP SWITCHES ON YOUR TRANSMITTER EACH OF WHICH CAN BE PLACED  
IN TWO DIFFERENT POSITIONS (ON/OFF) THESE SHOULD BE PLACED IN THE  
EXACT SAME POSITION AS THE SWITCHES ON YOUR RECEIVER. FOR SOME RECEIVE-  
-RS WHICH HAVE ONLY 9 DIP SWITCHES. IT WILL BE NECESSARY FOR YOU TO MOVE  
THE SMALL BLACK CODE TERMINAL TO CONNECT WITH PINS 2 & 3 THEREFOR FOR  
THE 9 DIP SWITCH MODEL RECEIVERS THE CODE SELECTION OF THE DIP SWITCHES  
ON YOUR TRANSMITTER 1 THRU 9 SHOULD BE SET EXACTLY THE SAME AS THOSE ON  
YOUR RECEIVER AND SWITCHES 10, 11, 12 ON THE TRANSMITTER SHOULD BE SET IN  
THE OFF POSITION.

DO NOT SET ALL SWITCHES IN THE SAME POSITION, SUCH AS ALL ON OR ALL OFF  
(FIGURE B). WARNING: NO OTHER ADJUSTMENTS SHOULD BE MADE INSIDE THE  
TRANSMITTER.

NOW THAT YOU HAVE SELECTED YOUR PERSONAL CODE, REPLACE THE TRANSMIT-  
-TER COVER.

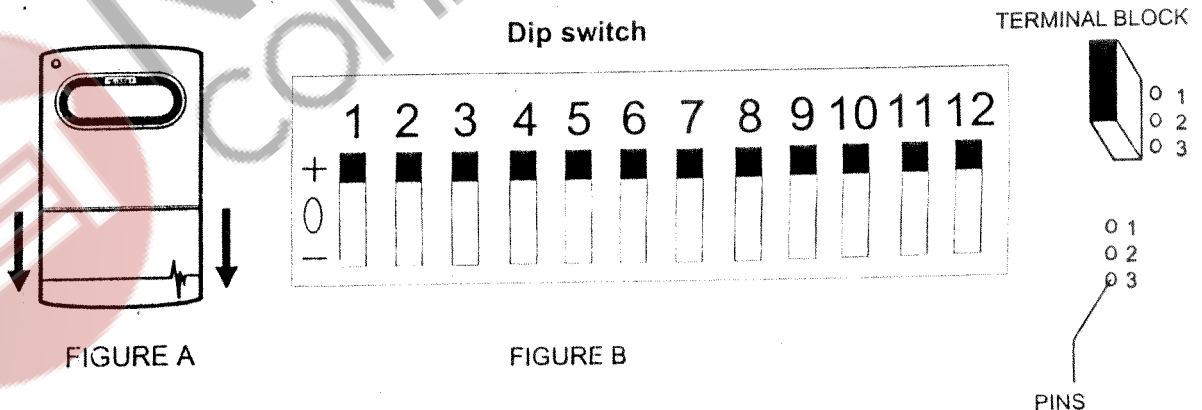

#### FCC NOTE:

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT  
TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL  
INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED,  
INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.